

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04J 3/24, H04L 12/28, 12/56, H04B 1/06		A1	(11) International Publication Number: WO 00/08788
			(43) International Publication Date: 17 February 2000 (17.02.00)
(21) International Application Number: PCT/US99/17793 (22) International Filing Date: 6 August 1999 (06.08.99) (30) Priority Data: 60/095,720 7 August 1998 (07.08.98) US 60/140,717 22 June 1999 (22.06.99) US (71)(72) Applicant and Inventor: ELZIND, Ihab, H. [US/US]; 6347 Paso Los Cerritos, San Jose, CA 95120 (US). (74) Agents: GOLDMAN, William, G. et al.; Limbach & Limbach LLP., 2001 Ferry Building, San Francisco, CA 94111 (US).			(81) Designated States: CN, JP, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: CELLULAR INTERNET PROTOCOL MODEM NETWORK

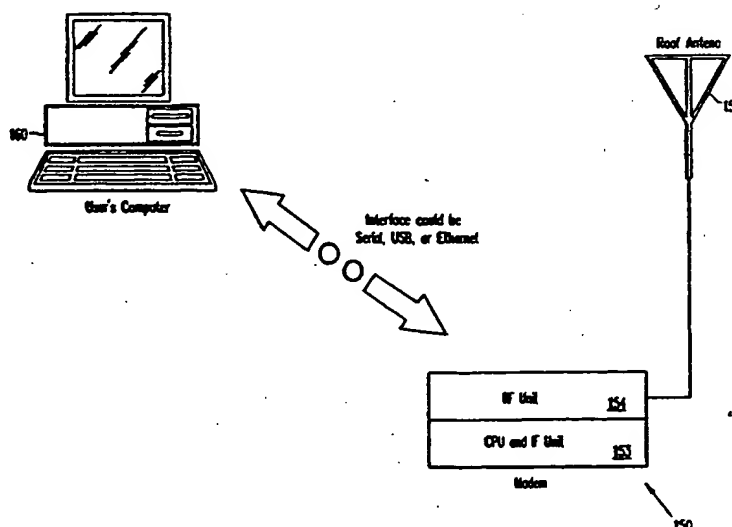

(57) Abstract

An apparatus (100) according to the present invention is a cellular IP modem (150) which includes a baseband-to-intermediate frequency unit (153), and a radio frequency unit (154). The baseband-to-intermediate frequency unit (153) is configured to have a routing engine based on Cellular Internet Protocol. A method according to the present invention includes the steps of sending a data packet including routing information indicating an intermediate recipient other than a base station; receiving the packet at the intermediate recipient; and sending the packet in accordance with the routing information from the intermediate recipient to the base station. Additionally, a network architecture is described to support the creation of the Cellular IP network and its elements.

CELLULAR INTERNET PROTOCOL MODEM NETWORK

BACKGROUND OF THE INVENTION

Field of Invention

5 The present invention relates to cellular wireless data communications. In particular, the invention relates to cellular communications using a unique Protocol called Cellular IP as well as the network architecture for it.

Description of the Related Art

10 FIG. 1 shows an existing cellular data network 50. The Internet Service Provider (ISP) 55 or service provider in general provides the connectivity of Internet traffic for various user stations 50, 57 and 58. The base station 55 creates the cell 49, creating cellular service. That is, user stations 50, 57 and 58 are within cell 49 and are served by
15 base station 55. The base station 55 connects the user stations 50 and 58 to the ISP 55 via a wireless link.

 However, user station 66 may be outside the range of the base station 55, or may be within range but does not have line of sight because of obstruction by buildings such as station 57 obstructed by
20 building 56. Therefore, user stations 57 and 66 cannot connect to the ISP 55.

 A conventional solution is to build another base station or repeater to service user stations 57 and 66. However, this may involve significant expenditures in cost and equipment. There is a
25 need for a more cost-effective way of providing service to user stations 57 and 66.

SUMMARY OF THE INVENTION

The present invention addresses these and other problems of the prior art by providing a Cellular Internet Protocol (CIP) system.

5 According to one embodiment, an apparatus according to the present invention is a cellular IP modem which includes a baseband-to-intermediate frequency unit and a radio frequency unit. The baseband-to-intermediate frequency unit is configured to have a routing engine based on Cellular Internet Protocol.

10 According to another embodiment, a method according to the present invention includes the steps of sending a data packet including routing information indicating an intermediate recipient other than a base station; receiving the packet at the intermediate recipient; and sending the packet in accordance with the routing information from the intermediate recipient to the base station.

15 According to another embodiment, a network architecture is described to support the creation of the Cellular IP network and its elements.

BRIEF DESCRIPTION OF THE DRAWINGS

20 FIG. 1 is a block diagram of an existing cellular network.

FIG. 2 is a block diagram of a Cellular IP packet according to the present invention.

FIG. MM-1 is a block diagram of the new Cellular IP network and its elements.

25 FIG. MM-2 is a block diagram of a user station that does not have line of sight because of obstruction according to the present invention.

FIG. MM-3 is a block diagram of an end user setup.

FIG. MM-4 is a block diagram of the base station setup and elements.

FIG. MM-5 is a description of how the frequency planning is done with respect to time.

5 FIG. 3 is an embodiment of a frequency table used to generate a coded spectrum.

FIG. 4 is an embodiment of the bit stream modulation according to the present invention.

10 FIG. 5 is an embodiment of the RF section according to the present invention.

FIG. 6 is an embodiment of the demodulation according to the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

15 FIG. 2 shows a frame format for a Cellular IP packet. The packet may be a variable-length packet with a maximum of 512 bytes. The packet may include a seven byte preamble, a one byte start-of-frame delimiter (SFD), a nine byte destination address (DA), a nine byte source address (SA), a 110 byte routing information block (RIB), a six byte type field, a six byte status field, a 360 byte data field and a
20 four byte cyclic redundancy check (CRC) field.

The preamble contains alternating 1s and 0s for determination of a collision and establishing synchronization.

The SFD may have a value of <A5>h to indicate the beginning of the frame.

25 The DA may have one byte for indicating a region, such as the location within a country of the recipient user station. Eight bits give 256 (2^8) regions. Two bytes may be used to indicate the cell identifier

within the region. Sixteen bits give 65,536 (2^{16}) cells. Six bytes indicate the Cellular IP address of the recipient user station within the cell.

5 The SA has fields similar to that of the DA but for indicating the sending user station instead of the recipient user station.

 The RIB indicates the path that the packet should take from the ending user station to the base station. With a maximum of 110 bytes, the RIB can specify up to ten links in the route from the sending user station to the base station.

10 The frame type field indicates whether the packet is a control packet or a service packet. Specifically, their first two bytes indicate the protocol, the second two indicate the subprotocol, and the last two indicate the service. For example, if the first two bytes are <7777>h and the second two bytes are <0707>h, this indicates an "upgrade
15 firmware" instruction with the third two bytes setting various flags. As another example, if the first two bytes are <0800>h, this indicates that the second two bytes will indicate "tcp/udp" and the third two bytes indicate the "service port number" (e.g., email is port 25, http is port 80 and ftp is port 20). Other subprotocols of Cellular IP include route
20 discovery protocol, echo protocol and remote configuration protocol.

 The status field may indicate information such as whether the packet is an ACK or a NACK packet, the number of data packets pending, spread spectrum synchronization information, or whether the packet is native or routed. The data field may include up to 360 bytes
25 of data. The CRC field includes error detection or correction information.

Routing Features

FIG. MM-2 illustrates the routing features of a Cellular IP network 100. The ISP 102 provides the switching of Internet traffic for various user stations 104 and 106. Other base stations define cells 112 and 114, respectively, of cellular service. That is, user station 104 is cell 100 and is served by base station 102, and so on. The modems in cells 104 and 106 connect to the ISP 102.

User station labeled HOME A is outside of cell 100, either because it is out of range or because it is within range but obstructed by buildings such as 107 or any other obstruction. In such an event, user station HOME A uses a routing table to construct a RIB indicating a suitable communications link.

The routing table may be static or dynamic. In static routing, the routing table is defined when the Cellular IP modem is first installed. The user station 116 has a routing table containing information indicating that user station HOME A may connect to the modem in HOME B which has coverage from the base station 102, among any other routing information. A number of additional routes is possible for additional redundancy in case HOME B is out of service.

Network Architecture Features

The network architecture is slotted collision sensing multiple architecture with carrier detect (CSMA/CD) where the entire bandwidth is shared between all the users. The Cellular IP may be implemented in a spread spectrum with frequency hopping. For example, each cell may be configured to broadcast in 100 time slots (or equivalently, 100 frequency hops). That is, there are 100 transmission hops each

second. Each user station and base station in the cell is configured with a starting hop number. The starting hop number is the number of the hop where any user modem can start transmitting packets until it is finished and while it is transmitting other users wait until it is finished even if it utilizes their hop slot. The advantage of this is since each modem starts at its own hop number, as long as no other modems are transmitting, it further reduces collisions between modems. For example, if the probability of collision in a CSMA/CD network where the modems can start transmitting at any random time is x and if this scheme of assigning a time reference "hop in this case" of 100 hops, this further reduces collisions by a factor of $x/100$. The hop number is either set at installation time or may be configured for each station via the ISP Base station.

This method minimizes collisions because each station listens to the current transmissions to determine if its starting hop number will be available. If it will be available, then the station begins a transmission on its starting hop number. If not, then the station waits. This reduces collisions because a collision only occurs when two conditions are met: (1) two stations have the same beginning hop number, and (2) both these stations want to transmit. -

User Station Components

FIG. MM-3 shows the components of a user modem 150 and a computer 160. In a transmission mode, the computer 160 generates a packet of any protocol and the modem puts it in Cellular IP packets and the modem 150 transmits the packets. In a receiving mode, the modem 150 receives Cellular IP packets and strips of the Cellular IP

information off of it and sends it to the computer 160 which processes the packets.

5 The modem 150 includes a radio frequency (RF) unit 154, antenna "indoor or outdoor" 155 and a baseband-to-intermediate frequency (BIF) unit 153. The RF unit 154 may be modular for inexpensive configuration for a desired operating frequency. Contemplated frequencies include MMDS at 2.6 GHz; LMDS at both 28 and 29 GHz; ISM at all three of 902-928 MHz, 2.4 GHz, and 5.7 GHz; ITFS; MDS; and other private frequencies.

10 The BIF unit 158 converts the baseband information from the computer 160 into intermediate frequency information for processing by the RF unit 154. The link between the modem 150 and the computer 160 may be a serial cable, parallel cable, SCSI cable, Ethernet or universal serial bus cable.

15 Although the present invention has been described with reference to a "modem" and a "computer," with increasing miniaturization it is contemplated that similar principles may be applied to an integrated device similar to today's existing cellular telephones and personal digital assistants. Furthermore, it is envisioned that the
20 present invention may also apply to the conversion and transmission of analog data (e.g., voice) as well as digital data.

ISP Station Equipment

FIG MM-4 shows the base station configuration. The base station 109 has a GPS antenna 113, a GPS unit 112, RF unit 111 and
25 a computer motherboard 110. The base GPS "Global Positioning Satellite Receiver" 112 and 113 are used to allow base stations to have a common timing reference.

FIG. MM-1 shows the configuration of three cells, cell #1, cell #2 and cell #3, which all use GPS "Global Positioning Satellite" 100 to establish a common reference between the three base stations so at time t1 from the satellite cell #1 uses frequency F1 and cell #2 uses frequency F2 and cell #3 uses frequency F3, at time t2 from the satellite the frequencies are reshuffled as shown in table #1 of FIG. MM-1, and so on.

FIG. MM-5 shows a satellite time frequency plan for the three base stations. This features allows our base stations to reuse frequencies in adjacent cells and further improve the utilization of the frequency spectrum.

In a given cell, such as cell #1 in Fig. MM-1, the modems remain synchronized to the base transmitting station 101 because the base transmitting station 101 transmits a synchronization burst periodically. This synchronization burst helps the modems of cell #1 to follow the carrier hops of the base transmission station 101 in cell #1 because the modems have determined from their programmed firmware which carrier frequencies the base transmission station 101 will hop to by extracting it from the synchronization burst of the base transmission station 101.

Coded Frequency Spectrum

In the network architecture described above, spread spectrum is employed to allow numerous cells to coexist in the same geographical space.

According to the invention a byte stream acts as codes given to the frequency bank controller to generate a unique spectrum

associated with this byte based on a pre defined table of codes relating bytes to spectrums such as shown in Fig. 3.

5 The output of the frequency bank is then taken to a summing node to create a spectrum. For example, if a three bit byte comes in it will drive the bit0, bit1, bit2 and enable or disable the buffer to create or not to create a sin wave in the spectrum.

10 In the preferred embodiment, such as shown in Fig. 4, Bit0 to Bit7 are the byte stream input from the computer. Iout is the spectrum output to drive in the phase carrier. Q output is the spectrum output to drive the Q output of the quadrature carrier.

15 Any transmitter built using coded frequency spectrum modulation in a spread spectrum system, whether frequency hopping of direct sequences for wireless computer communications to create a cellular internet or a wide area network based or not based on cellular internet protocol, falls within the scope of the invention as well as coded frequency spectrum modulation used in wired computer communications whether spread spectrum or not.

20 Generally, an embodiment of the RF section of the code frequency spectrum modulation receiver is shown in Fig. 5. The antenna receives the signal and amplifies it. Then any out of band signal is filtered out and then mixed with hopping spread spectrum frequencies determined by a synthesizer, which exactly match the same order of the transmitter to generate IF output.

25 The demodulator stage is shown in Fig. 6. Additional stages of gain are needed to compensate for losses. The I/Q demod demodulates the IF into two spectrums, I code frequency spectrum modulation spectrum and Q code frequency modulation spectrum, respectively. The tone decoding phase locked loops decode the tone

components of the code frequency spectrum modulation spectrums into original bits forming the bytes that originally generate the tones; then it is sent to the computer.

WHAT IS CLAIMED IS:

1. A cellular data packet, comprising:
 - a preamble for collision determination and synchronization;
 - a start-of-frame delimiter (SFD);
 - 5 a destination address (DA);
 - a source address (SA);
 - a routing information block (RIB); and
 - an informational field.
2. The cellular data packet of claim 1, wherein said informational field comprises:
 - 10 a type field for indicating whether said packet is a control packet or a service packet;
 - a status field;
 - a data field; and
 - 15 a cyclic redundancy check (CRC) field, including error detection and correction information.
3. The cellular data packet of claim 2, wherein said type field comprises:
 - 20 a two-byte protocol identifier;
 - a two-byte sub-protocol identifier; and
 - a two-byte service identifier.
4. The cellular data packet of claim 2, wherein said status field is configured to indicate whether said packet is an ACK or a NACK packet, the number of data packets pending, spread spectrum synchronization information, or whether said packet is native or routed.
- 25

5. The cellular data packet of claim 1, wherein said destination address comprises:

a region indicator for indicating a region location of a recipient user station;

5 a cell identifier for indicating a cell within said region; and
a cellular IP address of said recipient user station within said cell.

6. The cellular data packet of claim 1, wherein said source address comprises:

10 a region indicator for indicating a region location of a transmitting user station;

a cell identifier for indicating a cell within said region; and
a cellular IP address of said transmitting user station within said cell.

15 7. The cellular data packet of claim 1, wherein said routing information block indicates a routing path of said packet from said transmitting/receiving user station to said base station.

20 8. The cellular data packet of claim 7, wherein said routing information block is configured to indicate up to ten routing links between said transmitting station and said base station.

9. The cellular data packet of claim 1, wherein said packet is a variable-length data packet.

10. The cellular data packet of claim 9, wherein said packet has a maximum byte-length of 512 bytes.

11. A method for routing a data packet within an intelligent cellular IP network, wherein a transmitting/receiving station is outside of an
5 originating transmitting or destination receiving cell or blocked from said originating transmitting or destination receiving cell, comprising the steps of:

transmitting a data packet, including routing information indicating at least one intermediate recipient other than a base station;

10 receiving of said packet by said at least one intermediate recipient; and

transmitting said packet in accordance with said routing information from said at least one intermediate recipient to said receiving base station;

15 wherein said at least one intermediate recipient is a different transmitting/receiving station within said cell.

12. The method of claim 11, wherein said routing information is determined from a routing table specific to each of said transmitting/receiving stations.

20 13. The method of claim 12, wherein said routing table can be static or dynamic.

14. A reduced collision cellular network for transmitting/receiving cellular IP data packets, comprising:

a plurality of cells distributed within said network, each of said cells associated with a certain frequency at a given time;

a base station located within each of said cells, configured to reshuffle said frequencies of adjacent cells according to a common timing reference and periodically transmit a synchronization burst to each of said plurality of cells; and

a plurality of user transmission/receiving stations located within each of said plurality of cells within said network, each of said user transmission/receiving stations associated with a respective frequency hop number, wherein said transmission/receiving stations are configured to actively transmit/receive data packets if said associated frequency hop number is determined to be available, and wherein each of said user transmission/receiving stations within a respective one of said plurality of cells remain synchronized to said base station based upon said periodic synchronization burst.

15. The cellular network of claim 14, wherein the common timing reference is determined from a global positioning satellite.

16. An cellular modem, comprising:

a radio frequency unit for transmitting/receiving data packets;

and

a baseband-to-intermediate frequency conversion unit, having a cellular network routing engine based on cellular IP, configured to covert the baseband information from a computer into intermediate frequency information for processing by said radio frequency unit; wherein said modem is configured to serve as a router within said cellular network.

17. The cellular modem of claim 16, wherein said radio frequency unit is configured to operate in the MMDS, LMDS, ISM, ITFS and MDS spectrums.

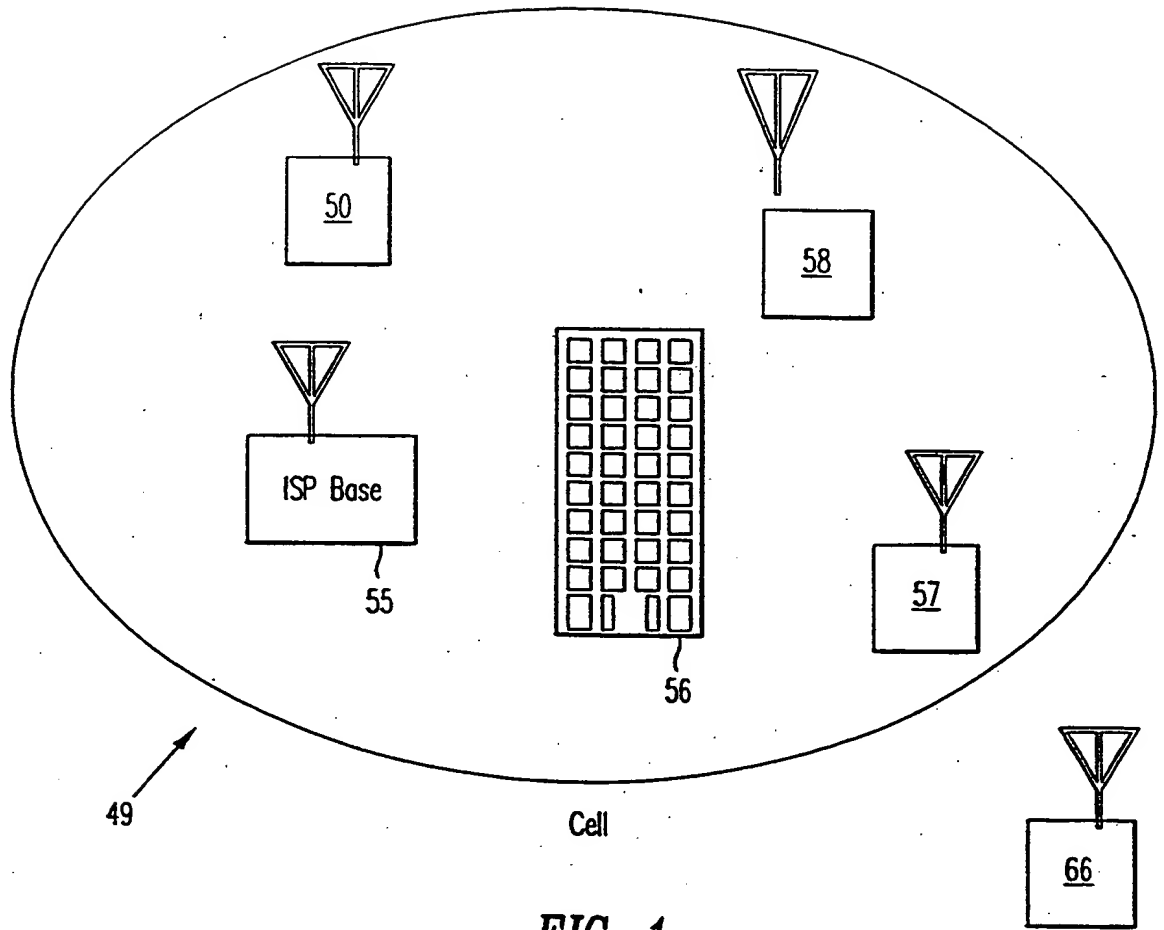


FIG. 1
(Prior Art)


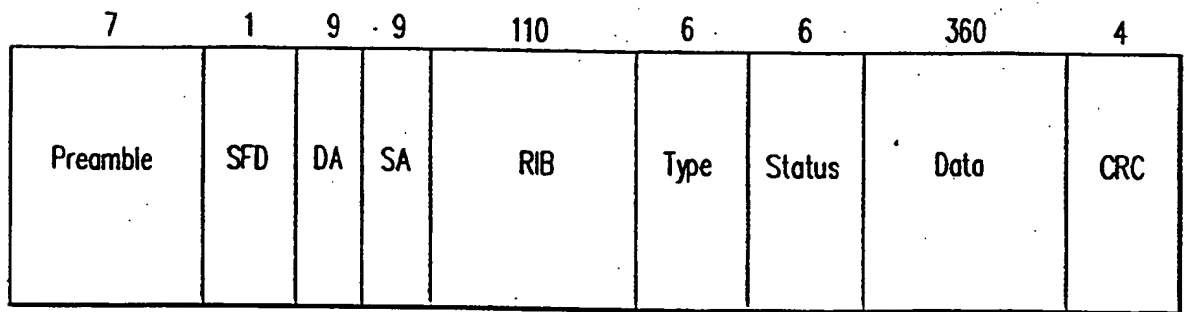


FIG. 2

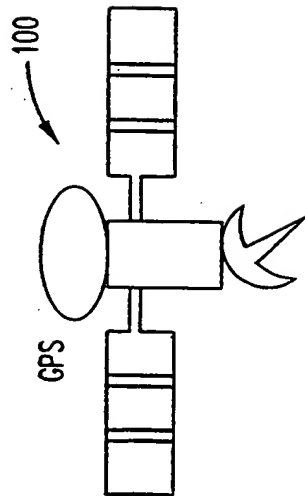

GPS is used for establishing reference.

Frequency used is Time Multiplexed.

Time	Frequency	Cell
T1	F1	Cell #1
	F2	Cell #2
	F3	Cell #3
T2	F2	Cell #1
	F3	Cell #2
	F1	Cell #3

Table #1

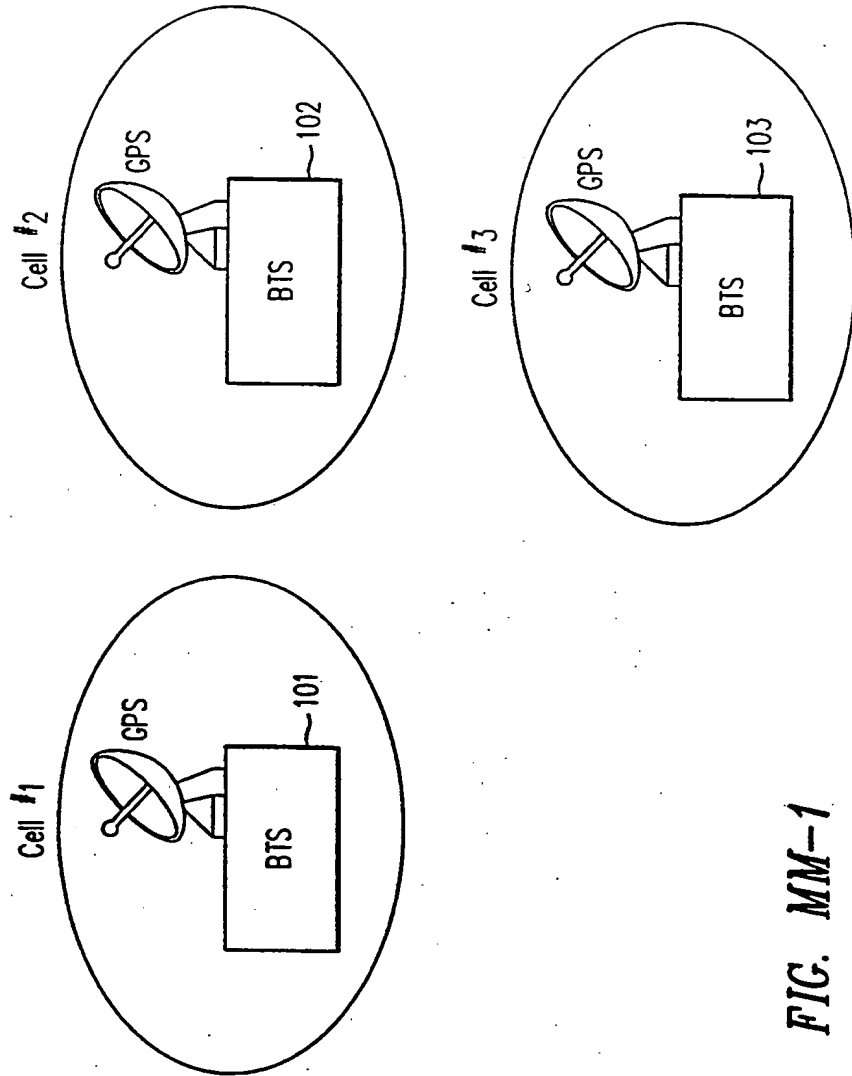


FIG. MM-1

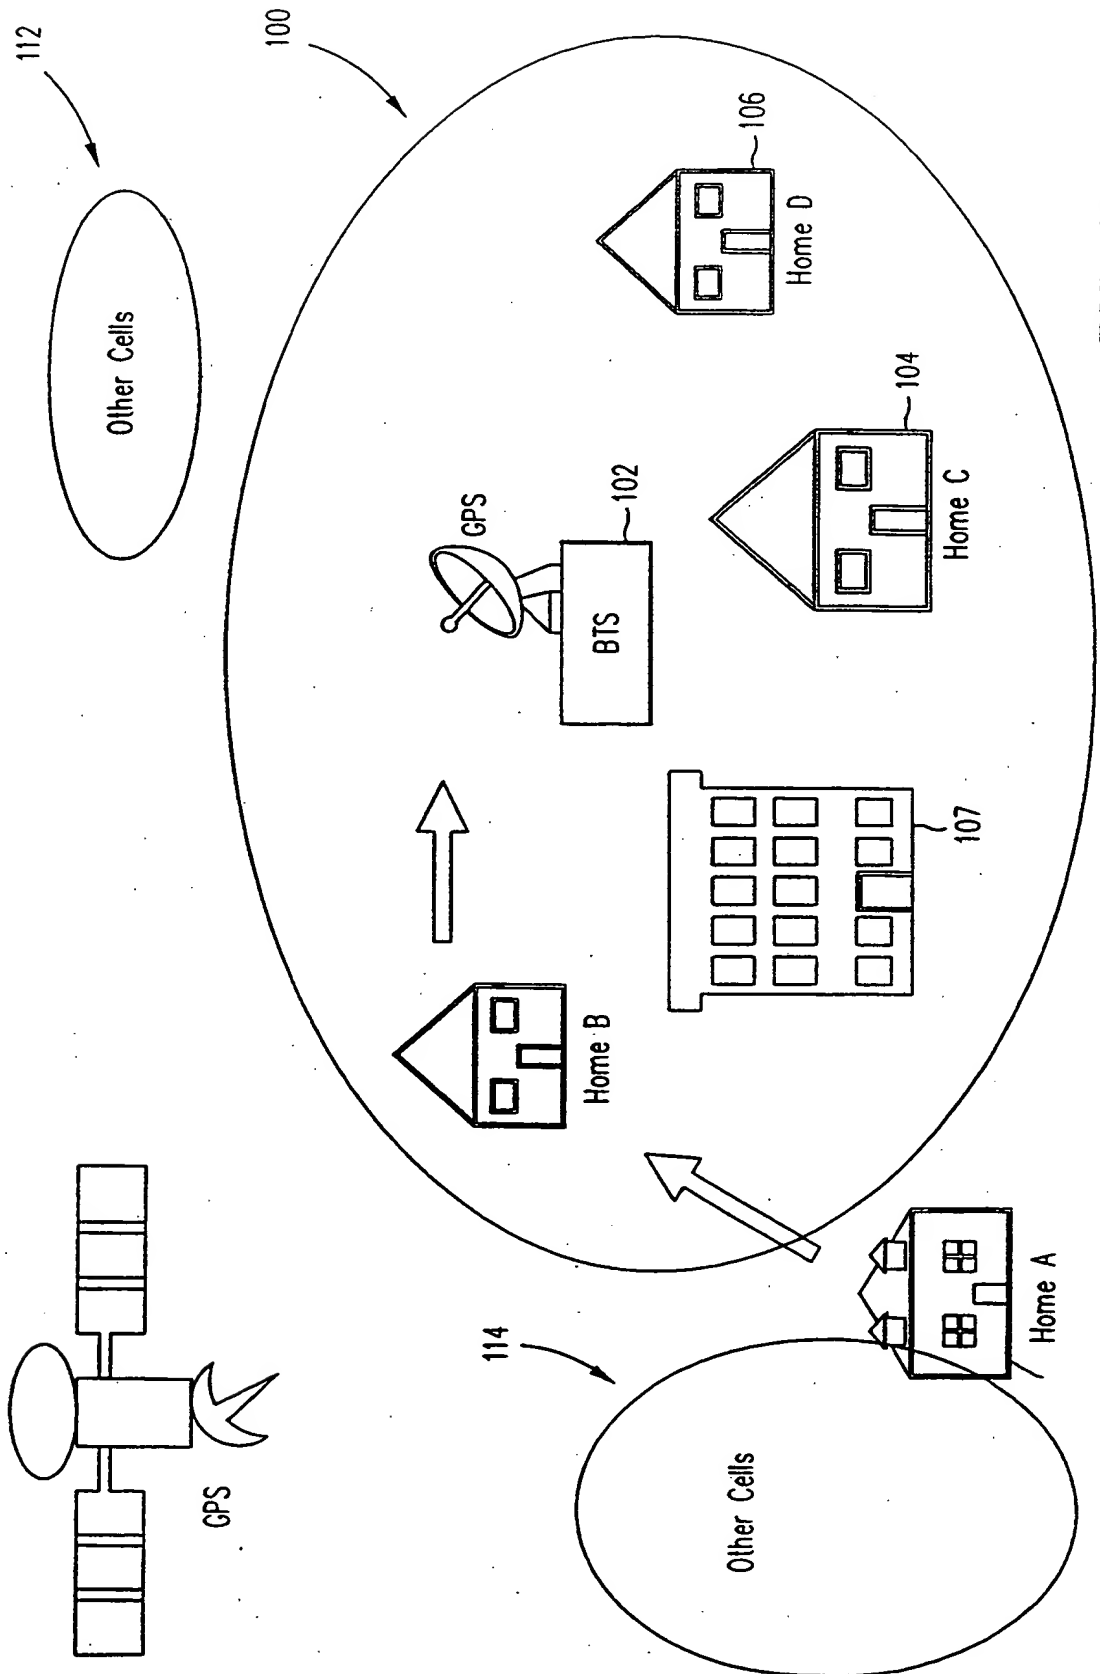


FIG. MM-2

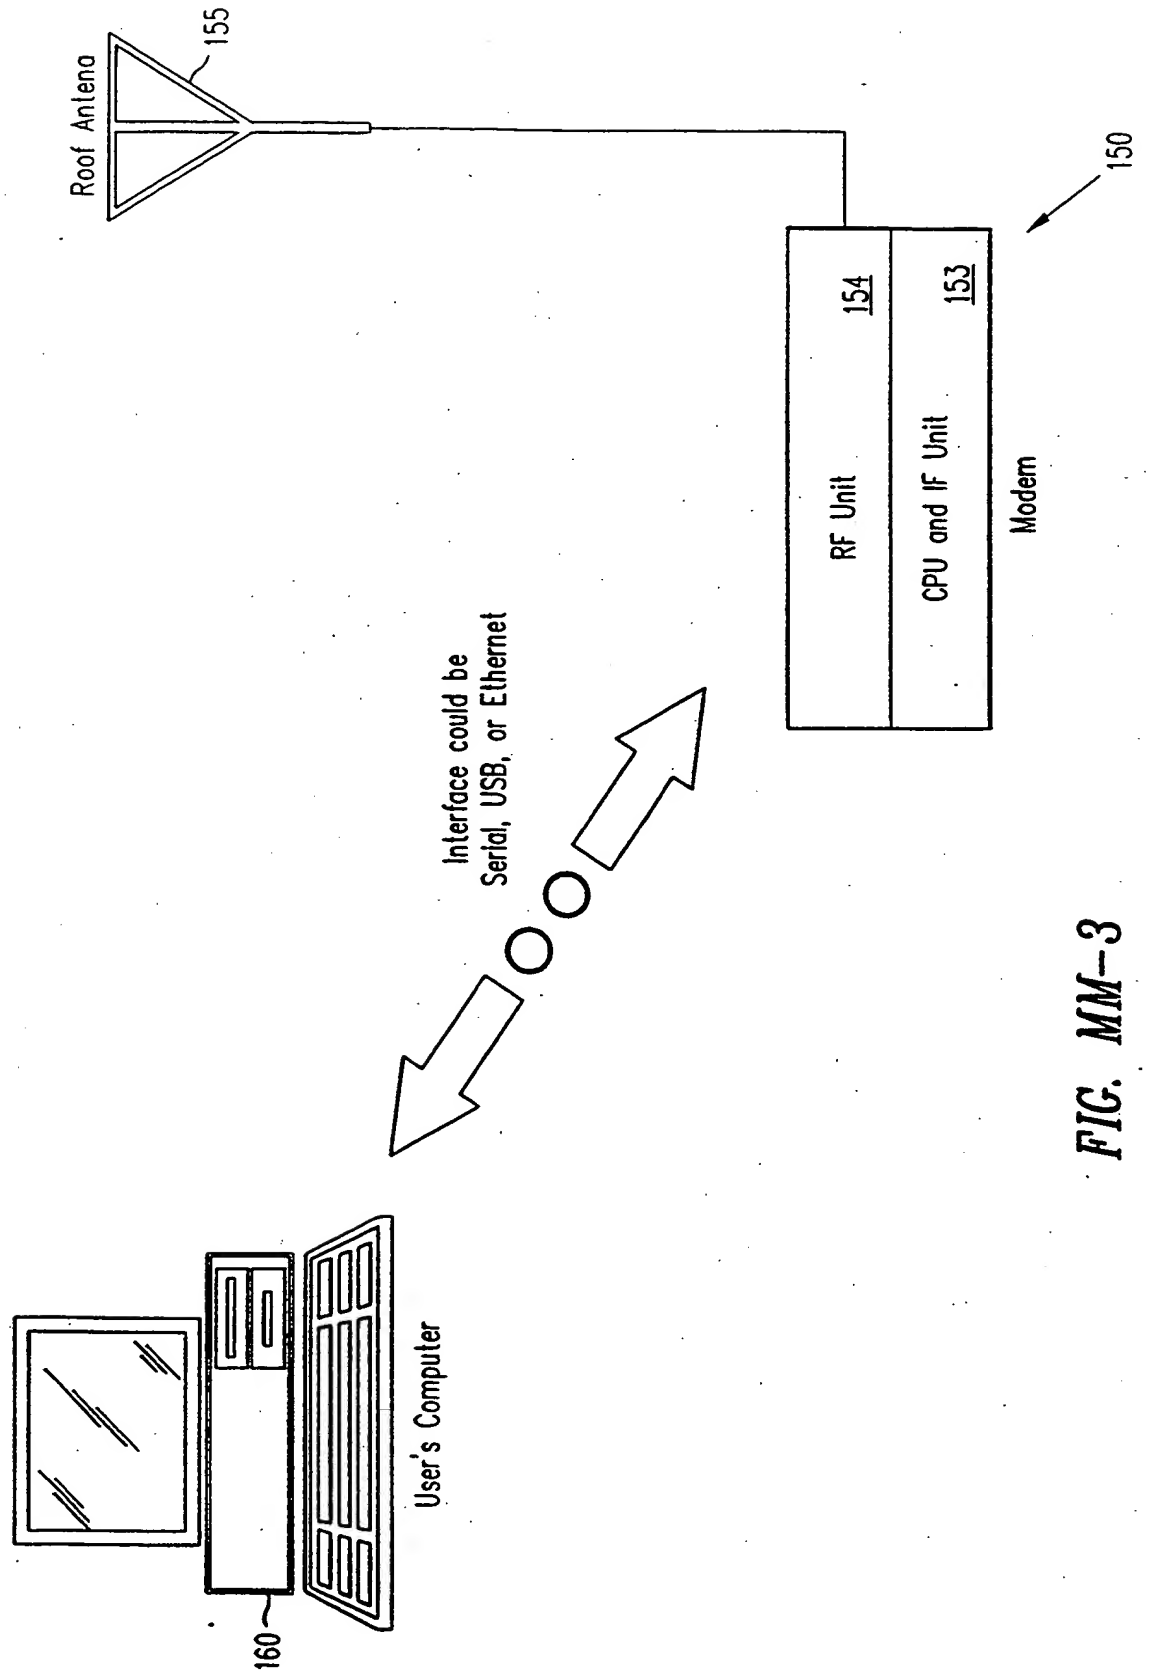


FIG. MM-3

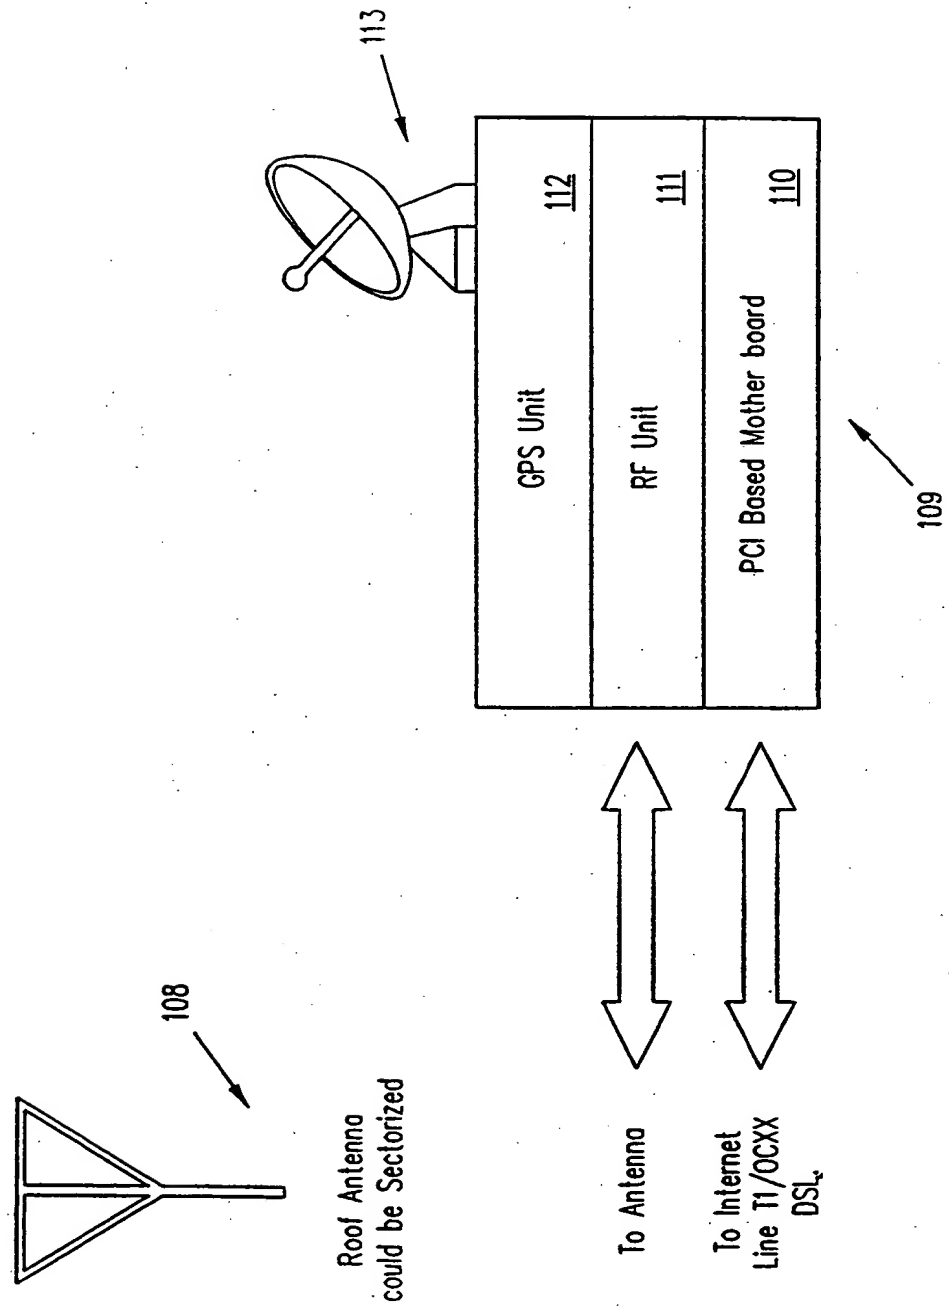


FIG. MM-4

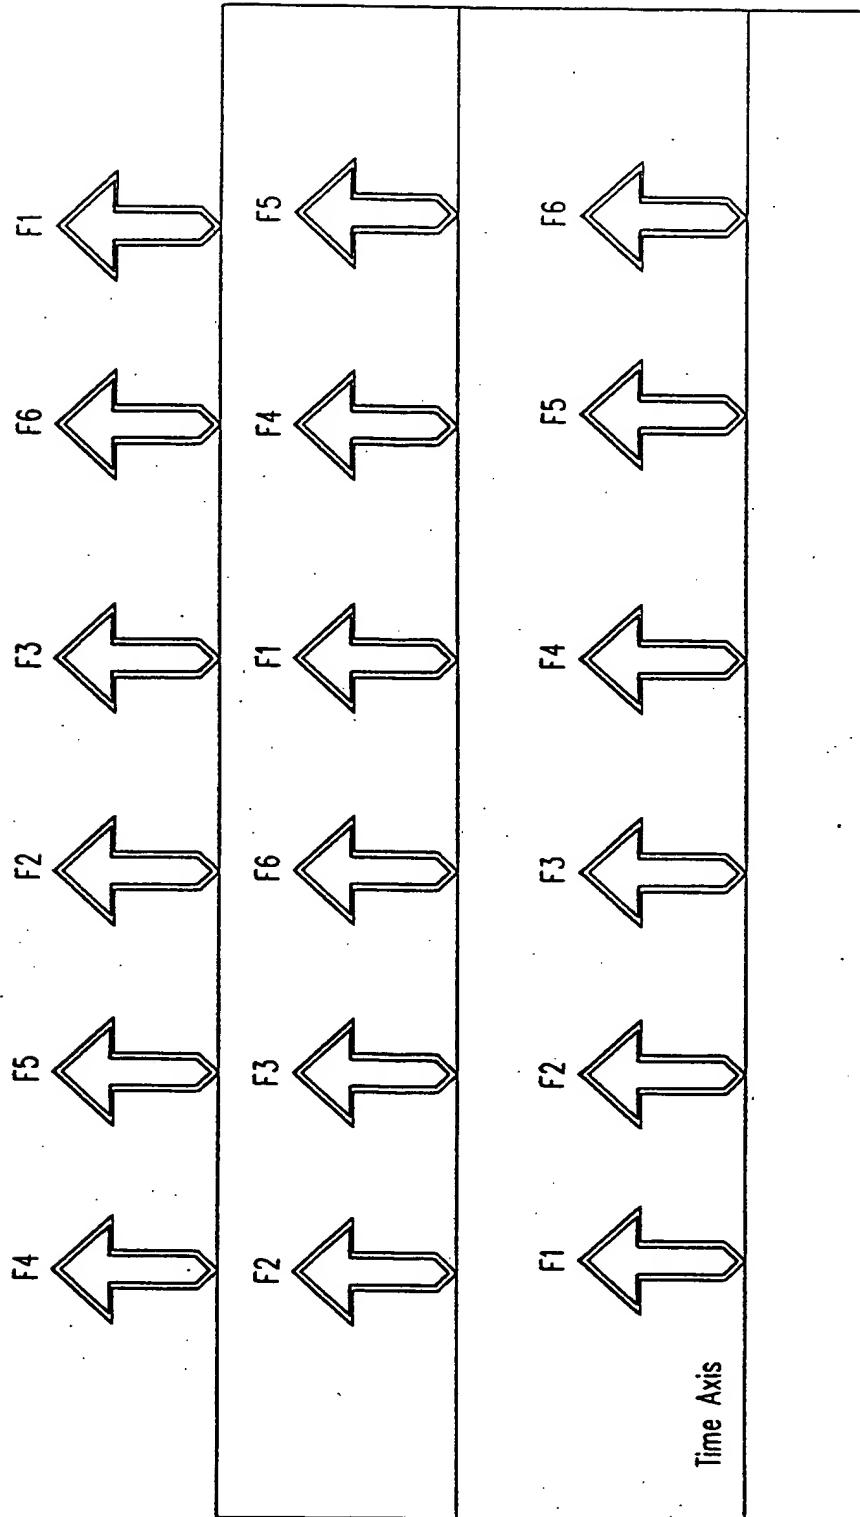


FIG. MM-5

7/9

Byte Stream split to two nibbles in Hex	SPECTRUM for I	Spectrum for Q	
0	F5	F4 + F5 + F1	
1	F1	F1 + F5 + F2	
2	F2	F1 + F2 + F4	
3	F3	F3 + F2 + F4	
4	F4	F3 + F1 + F2	
5	F1 + F2	F2 + F4	
6	F1 + F3	F2 + F3	
7	F1 + F4	F1 + F4	
8	F2 + F3	F1 + F3	
9	F2 + F4	F1 + F5	
A	F3 + F1 + F2	F1 + F2	
B	F3 + F1 + F4	F4	
C	F3 + F2 + F4	F3	
D	F1 + F2 + F4	F2	
E	F1 + F5 + F2	F1	
F	F4 + F5 + F1	F5	

Example:

byte stream	I	Q
0	5	F5
a	0	F3 + F1 + F2
f	1	F4 + F5 + F1
3	3	F3
5	7	F1 + F2
3	b	F3
		F2 + F4
		F4 + F5 + F1
		F1 + F5 + F2
		F3 + F2 + F4
		F1 + F4
		F4

Table 1

FIG. 3

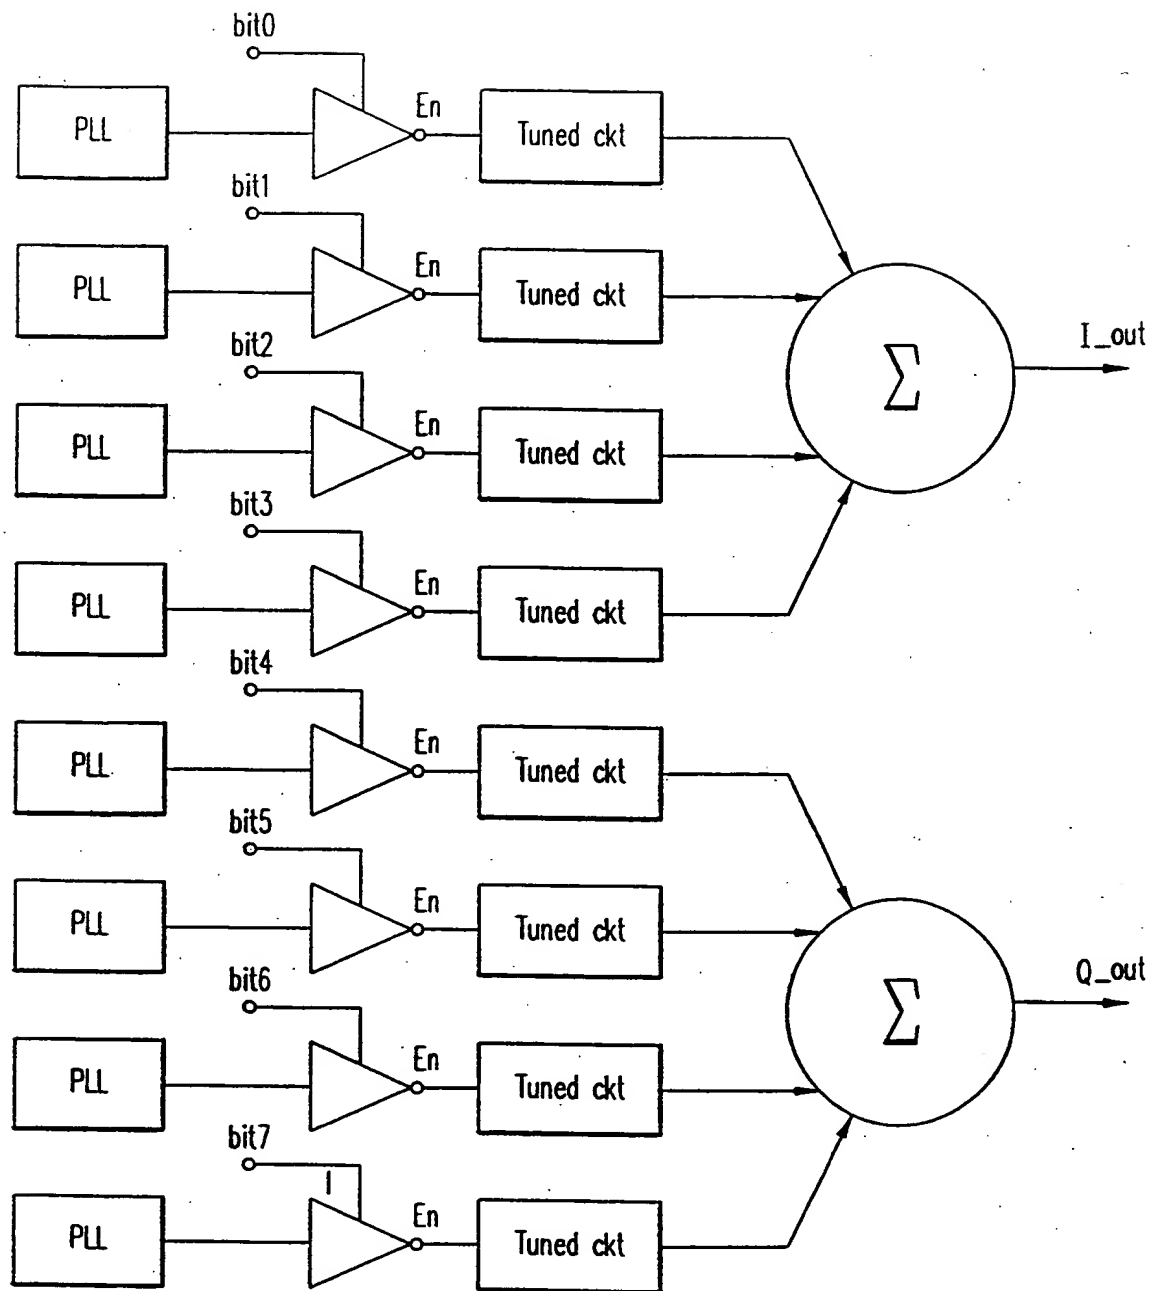


FIG. 4

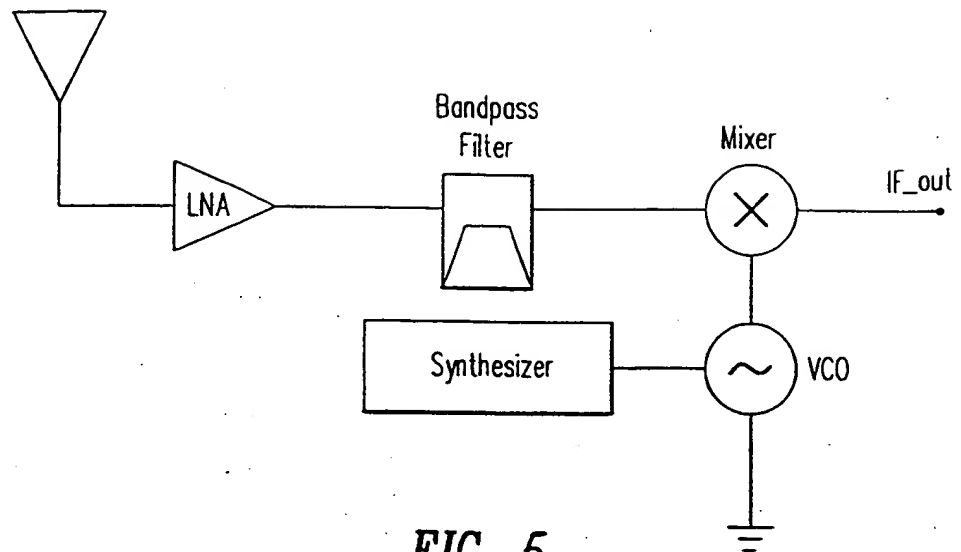


FIG. 5

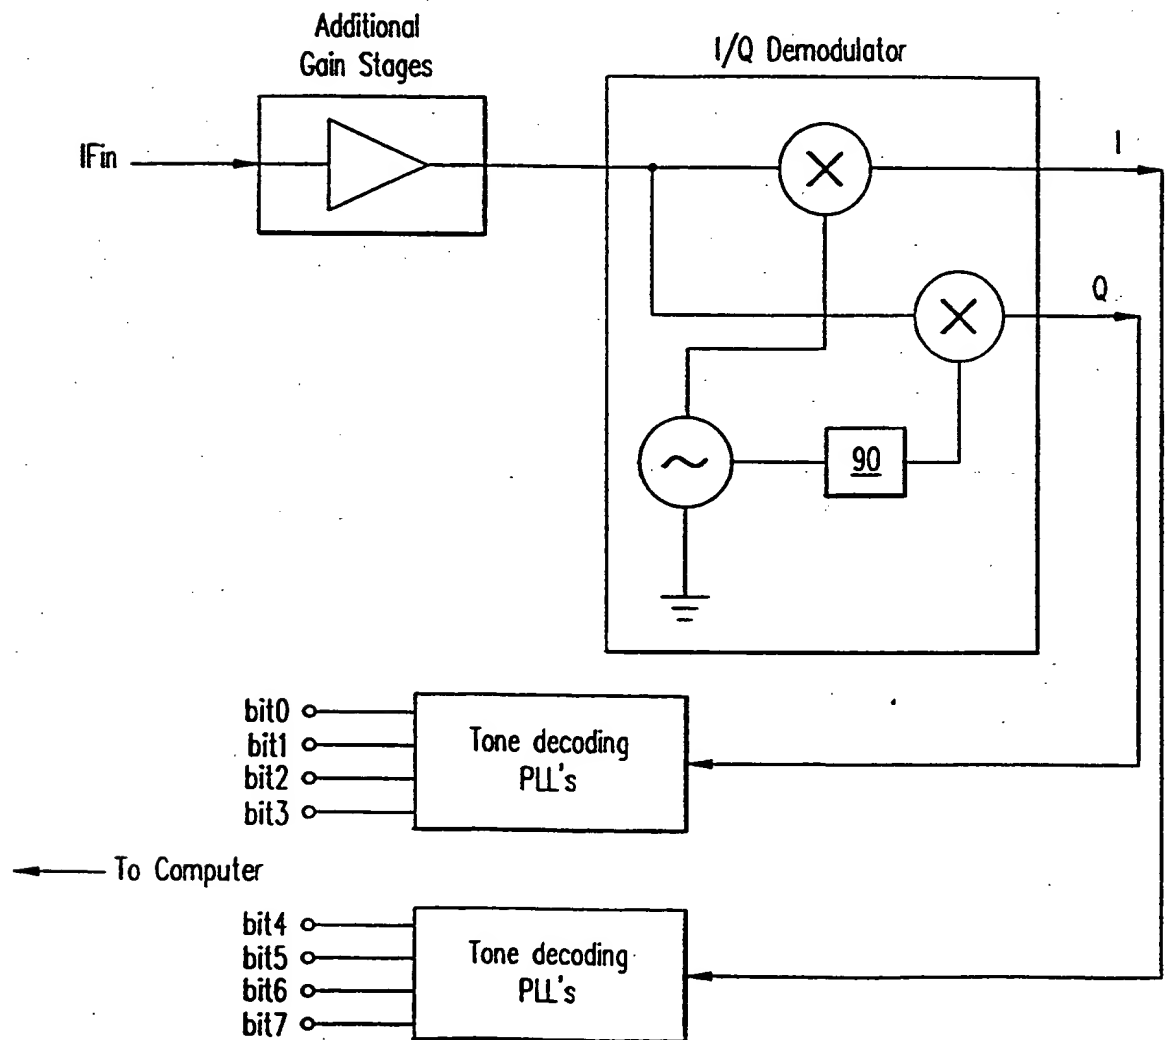


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US99/17793

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) : H04J 3/24; H04L 12/28, 12/56; H04B 1/06

US CL : Please See Extra Sheet.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/16-17, 58-60, 62, 67, 94.1, 95.1, 294, 349, 352, 389, 392; 379/58-59; 455/12.1, 33.1, 34.1, 53.1, 54.1 56.1, 332, 427.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
NONE

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
APS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,159,592 A (PERKINS) 27 October 1992, entire doc.	1-17
A	US 5,442,633 A (PERKINS et al) 15 August 1995, entire doc.	1-17
A	US 5,533,029 A (GARDNER) 02 July 1996, entire doc.	1-17
A	US 5,544,222 A (ROBINSON et al.) 06 August 1996, entire doc.	1-17
A	US 5,590,133 A (BILLSTROM et al.) 31 December 1996, entire doc.	1-17
A	US 5,606,595 A (EJZAK) 25 February 1997, entire doc.	1-17
A	US 5,713,075 A (THREADGILL et al.) 27 January 1998, entire doc.	1-17

☒ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	*T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X*	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y*	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z*	document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means		
P document published prior to the international filing date but later than the priority date claimed		

Date of the actual completion of the international search

11 NOVEMBER 1999

Date of mailing of the international search report

10 DEC 1999

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Authorized officer
PHAN, MAN

For [Signature]

PATENT COOPERATION TREATY

RECEIVED

FEB 08 2000

PCT

Limbach & Limbach

NOTIFICATION CONCERNING
SUBMISSION OR TRANSMITTAL
OF PRIORITY DOCUMENT

(PCT Administrative Instructions, Section 411)

From the INTERNATIONAL BUREAU

To:

600
GOLDMAN, William, G.
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco CA 94111
ÉTATS-UNIS D'AMÉRIQUE

REC'D 25 JAN 2000

PCT

17/2
1390

Date of mailing (day/month/year) 23 September 1999 (23.09.99)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference IHE-300 PCT	
International application No. PCT/US99/17793	International filing date (day/month/year) 06 August 1999 (06.08.99)
International publication date (day/month/year) Not yet published	Priority date (day/month/year) 07 August 1998 (07.08.98) JP
Applicant ELZIND, Ihab, H.	

- The applicant is hereby notified of the date of receipt (except where the letters "NR" appear in the right-hand column) by the International Bureau of the priority document(s) relating to the earlier application(s) indicated below. Unless otherwise indicated by an asterisk appearing next to a date of receipt, or by the letters "NR", in the right-hand column, the priority document concerned was submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b).
- This updates and replaces any previously issued notification concerning submission or transmittal of priority documents.
- An asterisk(*) appearing next to a date of receipt, in the right-hand column, denotes a priority document submitted or transmitted to the International Bureau but not in compliance with Rule 17.1(a) or (b). In such a case, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.
- The letters "NR" appearing in the right-hand column denote a priority document which was not received by the International Bureau or which the applicant did not request the receiving Office to prepare and transmit to the International Bureau, as provided by Rule 17.1(a) or (b), respectively. In such a case, the attention of the applicant is directed to Rule 17.1(c) which provides that no designated Office may disregard the priority claim concerned before giving the applicant an opportunity, upon entry into the national phase, to furnish the priority document within a time limit which is reasonable under the circumstances.

<u>Priority date</u>	<u>Priority application No.</u>	<u>Country or regional Office or PCT receiving Office</u>	<u>Date of receipt of priority document</u>
07 Augu 1998 (07.08.98)	60/095,720	US	21 Sept 1999 (21.09.99)
22 June 1999 (22.06.99)	60/140,717	US	21 Sept 1999 (21.09.99)

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No. (41-22) 740.14.35

Authorized officer

Olivia RANAIVOJAONA

Telephone No. (41-22) 338.83.38

RECEIVED
MAR 16 2000
LIMBACH & LIMBACH L.L.P.

PATENT COOPERATION TREATY

PCT

From the INTERNATIONAL BUREAU

To:
GOLDMAN, William, G. GCL
Limbach & Limbach L.L.P.
2001 Ferry Building
San Francisco, CA 94111
ÉTATS-UNIS D'AMÉRIQUE

NOTICE INFORMING THE APPLICANT OF THE
COMMUNICATION OF THE INTERNATIONAL
APPLICATION TO THE DESIGNATED OFFICES

(PCT Rule 47.1(c), first sentence)

Date of mailing (day/month/year) 17 February 2000 (17.02.00)		IMPORTANT NOTICE	
Applicant's or agent's file reference <u>IHE-300 PCT</u>			
International application No. PCT/US99/17793	International filing date (day/month/year) 06 August 1999 (06.08.99)	Priority date (day/month/year) 07 August 1998 (07.08.98)	
Applicant ELZIND, Ihab, H.		80 mo date 4/7/2000 en ca 30 mo date 2/7/2001 en ca	

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:
CN, EP, JP, US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:
None

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on 17 February 2000 (17.02.00) under No. WO 00/08788

REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a demand for international preliminary examination must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))

If the applicant wishes to proceed with the international application in the national phase, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland Facsimile No. (41-22) 740.14.35	Authorized officer J. Zahra Telephone No. (41-22) 338.83.38
----------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------